

# LogiLink®

## Notebook Power Adapter Ultra-Slim, 100W


Art. No.: PA0173



Ideal as a replacement or secondary power adapter for various notebooks and smartphones at home and in the office.


### Features:

- » 100W Ultra-slim Universal Notebook Power Adapter with 10 changeable tips
- » Charge most brands of laptops in market with multiple easy-to-install tips
- » Reliable replacement or secondary power adapter in home or office
- » Full safety design: Built-in protection against over current, over voltage, over temperature and short-circuit protection

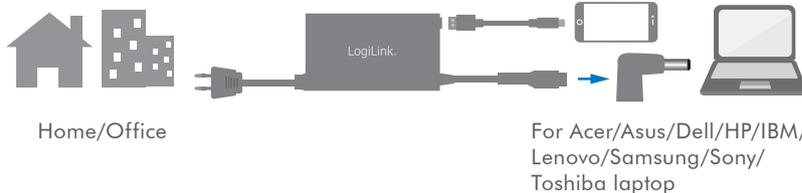

### Power Tips Compatible Table:

K2	7.4 x 5.0 mm	HP 18.5V 3.5A, 19V 4.7A, 19.5V 3.33A
K3	6.5 x 4.4 mm	Sony 19.5V 3A/3.33A/3.9A/4.7A
K4	5.5 x 3.0 mm	Samsung 19V 3.16A/4.22A/4.74A
K5	5.5 x 2.5 mm	Asus/Toshiba/Lenovo 19V 3.42A/3.95A/4.74A, 20V 3.25A/4.5A
K6	5.5 x 1.7 mm	Acer 19V 3.42A/4.74A
K9	4.5 x 3.0 mm	Dell 19.5V 3.34A/4.62A
K10	4.5 x 3.0 mm	HP 19.5V 3.33A/4.62A
K15	7.4 x 5.0 mm	Dell 19.5V 3.34A/4.62A
K16	Square size	Lenovo/IBM 20V 3.25A/4.5A
K17	4.8 x 1.7 mm	HP 18.5V 3.5A/4.74A, 19.5V 3.33A

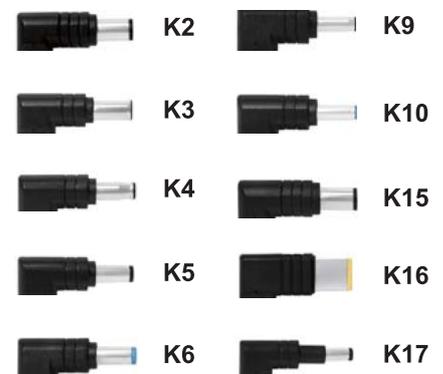

PA0173



4 052792 048247

Made in China



RoHS  
compliant



\* The specifications and pictures are subject to change without notice.  
\* All trade names referenced are the registered trademark of their respective owners.

# LogiLink®

## Notebook Power Adapter Ultra-Slim, 100W

Art. No.: PA0173



### Specification:

Input Voltage	AC 100-240V 50/60Hz 1.5A max
Output Power	18.5-20V 3-4.74A 90W max
USB Output	5V 2A (10W) max
Dimension	107 x 61 x 18mm(not including cable)
Weight	227g
Cable Length	1.8m
AC Cable Length	1.2m



### Package Contents:

- » 1 x Power Adapter for Notebook
- » 10 x Changeable Tips
- » 1 x AC Power Cord
- » 1 x User Manual

### Package Informations:

- » Packing Dimension: 194 x 127.5 x 42mm
- » Packing Weight: 0.45kg
- » Carton Dimension: 450 x 268 x 205mm
- » Carton Q'ty: 20pcs
- » Carton Weight: 9.5kg

### Warning

- \*For use with Information Technology Equipment.
- \*Compare the specifications of your device with the specifications of the adapter. The power current (A) of your device should be equal to or lower than the power current of the power supply.
- \*Only to be used indoor.
- \*Only to be used after powering on.
- \*Only to be used within max load.
- \*Remove the power adapter from its power source after use.



PA0173



Made in China



RoHS  
compliant



\* The specifications and pictures are subject to change without notice.  
\*All trade names referenced are the registered namework of their respective owners.

Best Connectivity