


NOTE:

1. CABLE: 30AWG, NON-UL, NON-FOIL, 30AWG*1P+30AWG*14C+D, WHITE COLOR, OD=4.5±0.2mm, PVC JACKET.
2. LENGTH: 1.0M.
3. CONNECTORS: Ipod30P MALE*1PCS, Ipod30P FEMALE*1PCS (SHELL NICKEL).
4. MOLD: ASSEMBLING Ipod TYPE.
5. CONTACTS:


Ipod30P M	1+2	3	4	7	8	11	12	13	15	16	18	19+20	21	23	25	27	29+30+64
Ipod30P F	1+2	3	4	7	8	11	12	13	15	16	18	19+20	21	23	25	27	29+30+64

1PAIR

6. Test machine test condition.
 - A. 100% OPEN, SHORT & INTERMITTANCE TEST.
 - B. CONDUCTOR RESISTANCE: 3ohms MAX.
 - C. INSULATION RESISTANCE: 5M Min/, 10ms.
7. ALL MUST BE MEET ON ROHS COMPLIANT.

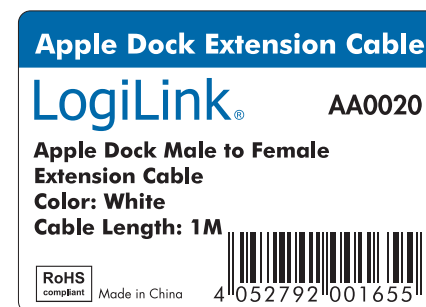

材質: 80P銅版紙, 上亮PP(光膠)
Pantone 2945C, Black
Label Size: 70 x 50 mm R= 2mm

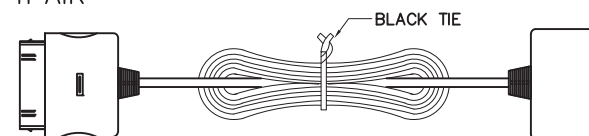

COMPANY		ITEM NO.	AA0020	NO	B				
REVISION	DATE	DISCRIPTION	DRAWN BY					SCALE	NON
REV.A/0	2012.07.06		DESIGNED BY					UNIT(mm)	
			APPROVAL BY					PAGE	1/1

Apple Dock Male to Female
Extension Cable

2direct GmbH