

NOTE:


1. CABLE: 30AWG,UL1007.WIRE CABLE\*5 PCS.
2. CENGT: 33\*4PCS, 25mm\*1PCS.
3. CONNECTOR: USB(A)M\*1PCS,USBAAF\*1PC(WHITE INSULATION)(SHELL NICKEL).
4. NOTE: CONTACTS:

USB(A)M 1 2 3 4 64

-----  
 USB(A)F 1 2 3 4 64

5. MOLD: MOLDING TYPE.
6. Test machine test condition.
  - A.100% OPEN,SHORT&INTERMITANCE TEST.
  - B.CONDUCTOR RESISTANCE: 3ohms MAX:
  - C.INSULATION RESISTANCE: 5M Min/,10ms:
7. ALL MUST BE MEET ON ROHS COMPLIANT.

Packing:  
 1PC in one PE Bag with Logilink sticker

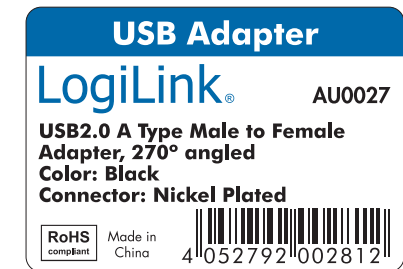

Pantone 2945C, Black  
 Size: 50 x 35 mm R= 2mm

COMPANY		ITEM NO.	AU0027	NO	B				
REVISION	DATE	DISCRIPTION	DRAWN BY					SCALE	NON
REV.A/0	2012.04.24		DESIGNED BY					UNIT(mm)	
			APPROVAL BY					PAGE	1/1
SPEC						<b>2Direct GmbH</b>			