


ROHS – COMPLIANT

LTR	REV.	DESCRIPTION	DATE

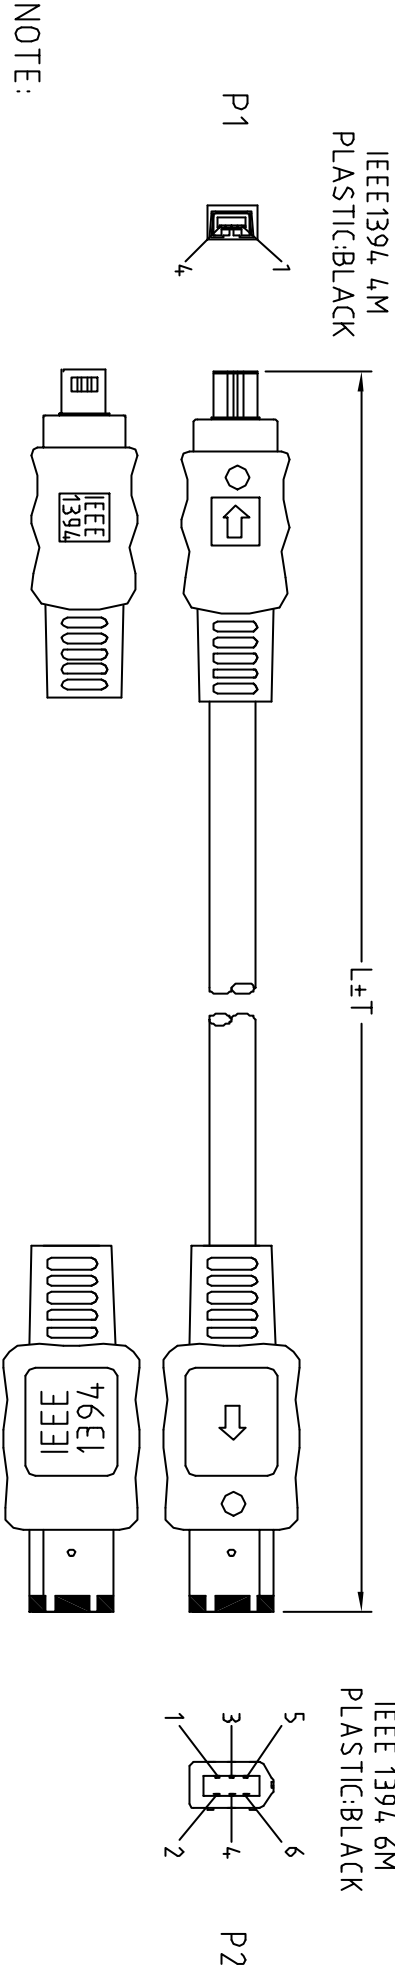

NOTE:

- 1.CABLE:[30AWG(7/0.102)T.C×1PAIR+AL/MYLAR+SPIRAL(50/0.1)]×2+FILLER+MYLAR×2+BRAID(90%)+PVC JACKET COLOR:BLACK(NK-K01)
OD:4.8±0.15mm UL20276 IEEE 1394 CABLE

2.CONNECTOR:

P1: IEEE1394 4PIN MALE GOLD PLATED 15μ” CONTACT;
NICKEL PLATED SHELL.

P2: IEEE1394 6PIN MALE GOLD PLATED 15μ” CONTACT;
NICKEL PLATED SHELL.

3.HOOD: MOLDED TYPE,PVC 45P , COLOR: BLACK(NK-K01)

4.TEST REQUEST:

<1>.100% OPEN SHORT MIS WIRE TEST


<2>.CONTACT RESISTANCE 3Ω MAX

<3>.INSULATION RESISTANCE 10MΩ MIN

5.PACKING: <1>EACH PC / POLYBAG + EAN CODE LABEL & ROHS LABEL

<2>EACH CARTON / ROHS LABEL(L×W=35×22mm)

170-2692-3	CF0006	5000±50mm	4260113560426
170-2692-2	CF0005	3000±30mm	4260113560419
170-2692-1	CF0004	1800±30mm	4260113560402
DWG	P/N	L±T	EAN CODE

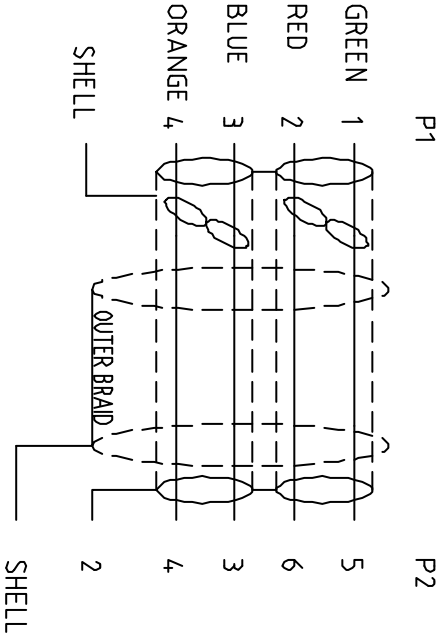

Tolerances			Inch	M/M
.X			.015	.30
.XX			.010	.10
.XXX			.005	.05
Draw				
FANNIE	04/14/06			
Chek				
Engr				

2DIRECT GMBH				
Title				
IEEE 1394 6/4 CABLE				
Customer P/N				
App'd		Customer		
Scale	NONE	Units	m/m	Third Angle Projection
Dwg No.	170-2692	REV:A	Sheet 1/2	

2DIRECT GMBH
Title
IEEE 1394 6/4 CABLE