
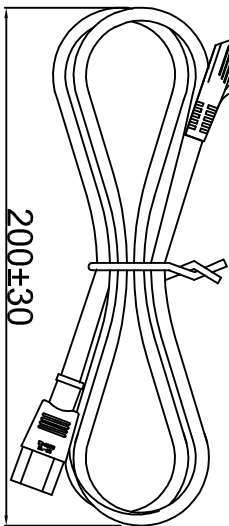
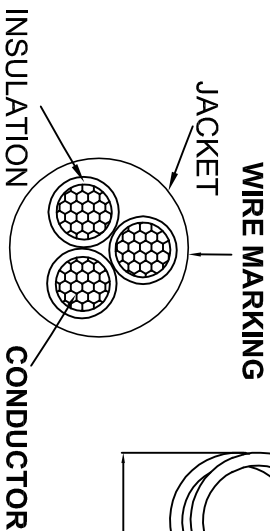
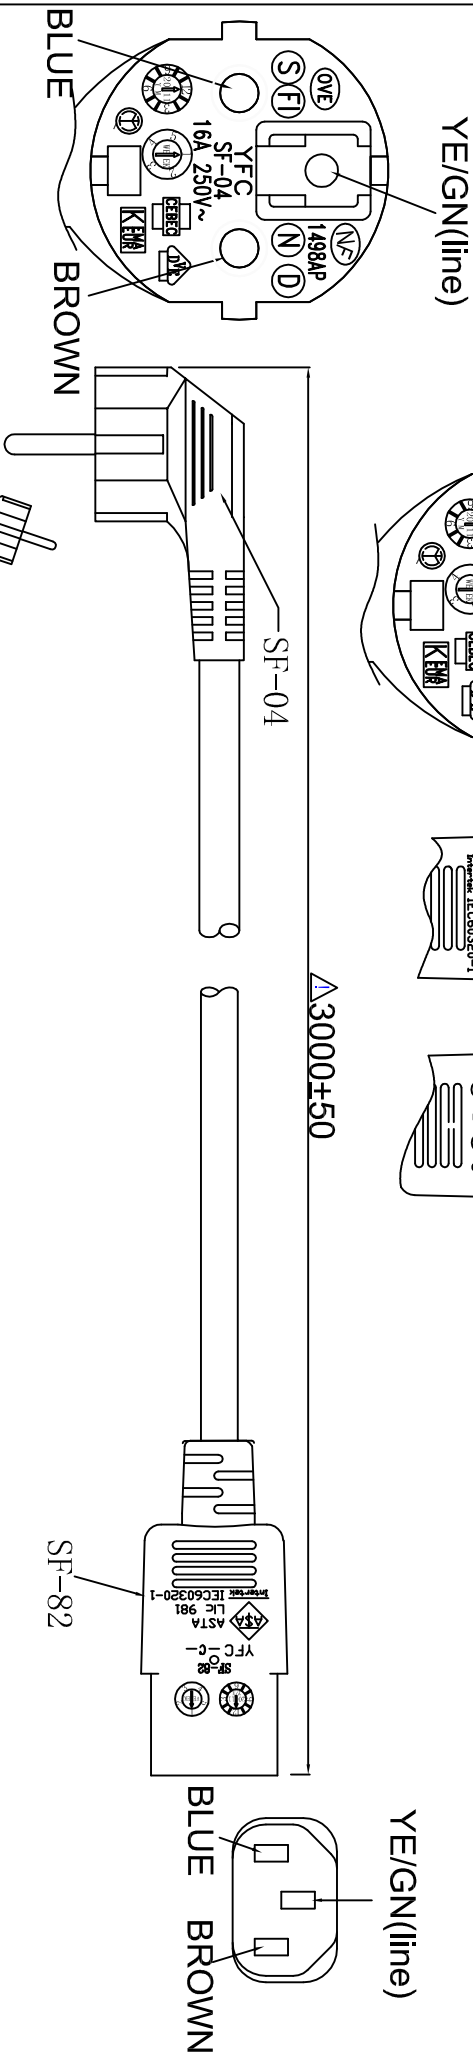


ROHS COMPLIANT

PLUG MARKING:

A/0

DATE	REV	DESCRIPTION	BY	CHECK
	A/0			

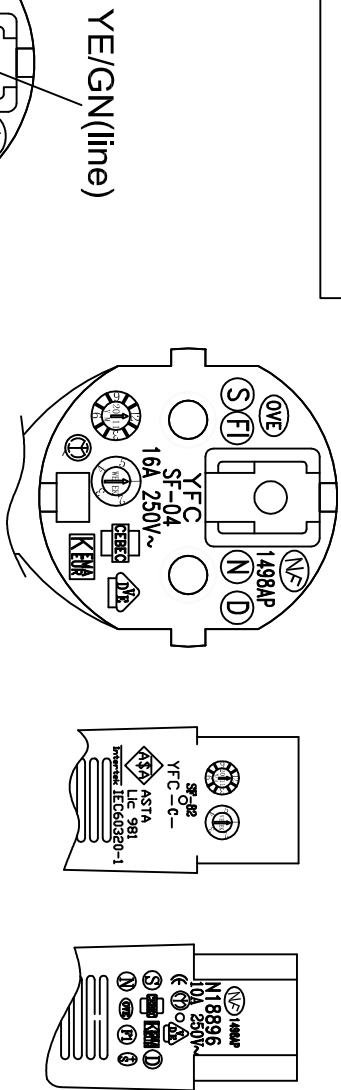

- ELECTRIC TESTING:
1. 100% OPEN & SHORT TESTING.
  2. INSULATION RESISTANCE: ≥250MΩ
  3. VOLTAGE RATING: AC ≥2000V/S ≥0.5MA
  4. PLUG(SF-04) RATED POWER: 250V 10/16A
  5. PLUG(SF-82) RATED POWER: 250V 10A
  6. WIRE: H05VV-F 3\*1.0 RATED VOLTAGE: 300/500V
  7. COLOR: BLACK

<b>WIRE MARKING:</b>		+ O + O + O KEMAK-KEUR		N D O O		V D E F		NF-USE 1345 IEMMEQU N17436	
(hollow)		H05VV-F 3G1.0MM <sup>2</sup> YFC BON-EAGLE							
Conductor 導體	Insulation 絕緣體	Jacket 被覆體	Overall diameter 完成外徑						
mm <sup>2</sup> Resistance maximum 最大電阻(≤)	Min.Thick 最小厚度	Diameter 絕緣外徑	Length of Lay 芯絞	Min.Thick 最小厚度	AVG.Thick 平均厚度				
1.0 (32.0.190)	0.44	2.5±0.1	130 ↓	0.58	0.8	7.0±0.1			
(NOTE: IF THE CONDUCTORS O.D IS GO BEYOND THE SCOPE. THE RESISTANCE OF CONDUCTOR IS STANDARD THEN)									

PAGE	1/1	<b>2Diect GmbH</b>							
重點尺寸		H05VV-F 3*1.0 SF-04+SF-82							
Unless specified on the drawing, tolerances are per the follows:		DESCRIPTION		CUSTOMER NAME		SAMPLE NO.		DATE	
.X ±0.5		CUSTOMER PART NO.		CP095		DRAW		DATE	
.XX ±0.1		SCALE				CHECK		DATE	
3RD		UNIT		MM		APPROVAL		DATE	
		PATH NAME		//D/業務					