



CAT.6A S/FTP PUR Patch Cable

Technical Features

Industrial Use, IP20

CAT.6A Class EA S/FTP

27AWG, 500MHz 10G

Acid Resistant

UV Resistant

Hydrolysis Resistant


Halogen Free (Conform IEC 60754)

Oil Resistant (Conform EN 60811-2-1)

Flame Resistant (Conform IEC 61034)

Max. Operating temperature -40~90°

Technical Drawings

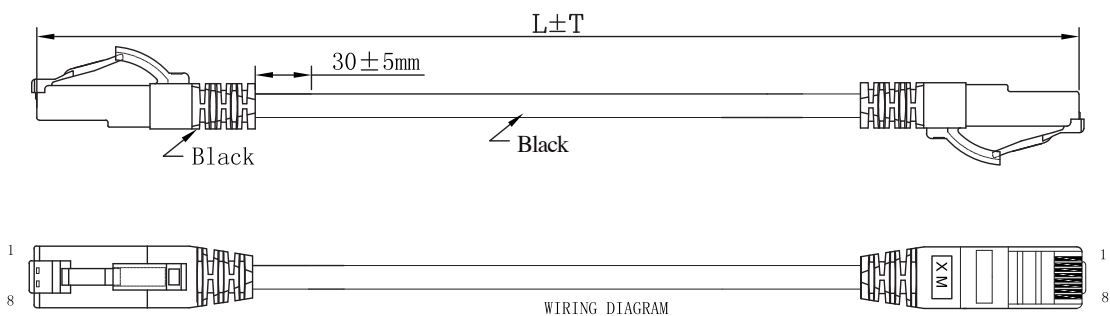

P 1		P 2	
1		1	WHITE
2		2	ORANGE
3		3	WHITE
6		6	GREEN
4		4	BLUE
5		5	WHITE
7		7	WHITE
8		8	BROWN
shell	braid	shell	

www.logilink.de



RoHS
compliant



Length	Black	EAN Code
0.50 m	CQ6025S	4052792049763
1.00 m	CQ6035S	4052792049770
2.00 m	CQ6055S	4052792049787
3.00 m	CQ6065S	4052792049794
5.00 m	CQ6075S	4052792049800
7.50 m	CQ6085S	4052792049817
10.00 m	CQ6095S	4052792049824
15.00 m	CQ6105S	4052792049831
20.00 m	CQ6115S	4052792049848
30.00 m	CQ6125S	4052792049855
40.00 m	CQ6135S	4052792049862
50.00 m	CQ6145S	4052792049879

Package Contents

CAT.6A S/FTP PUR Patch Cable x 1

Packaging Informations

Art-No.	Packing Dimension	Packing Weight	Carton Dimension	Carton Q'ty	Carton Weight
CQ6025S	100 x 100 x 10mm	0.036kg	400 x 300 x 300mm	260pc	10.4kg
CQ6035S	100 x 100 x 15mm	0.053kg	400 x 300 x 300mm	200pc	11.6kg
CQ6055S	110 x 110 x 20mm	0.087kg	400 x 300 x 300mm	100pc	9.7kg
CQ6065S	125 x 125 x 30mm	0.118kg	400 x 300 x 300mm	80pc	10.5kg
CQ6075S	120 x 120 x 30mm	0.182kg	400 x 300 x 300mm	55pc	11kg
CQ6085S	135 x 135 x 35mm	0.274kg	400 x 300 x 300mm	45pc	13.3kg
CQ6095S	140 x 140 x 40mm	0.35kg	400 x 300 x 300mm	30pc	11.5kg
CQ6105S	160 x 160 x 50mm	0.531kg	400 x 300 x 300mm	25pc	13.8kg
CQ6115S	150 x 150 x 60mm	0.699kg	400 x 300 x 300mm	18pc	13.6kg
CQ6125S	180 x 180 x 60mm	1.039kg	400 x 300 x 300mm	14pc	15.1kg
CQ6135S	180 x 180 x 60mm	1.379kg	400 x 300 x 280	12pc	17kg
CQ6145S	190 x 190 x 75mm	1.719kg	400 x 300 x 280	10pc	17.6kg

www.logilink.de



RoHS
compliant

