

LogiLink®




DisplayPort 1.2 to VGA Adapter, Active

Art. No.: CV0059B

CV0059B is a DisplayPort™ to VGA converter that receives both video and audio streams from an upstream DisplayPort Source link and converts to a VGA output.

Features:

- » Compliant with DisplayPort 1.2
- » Integrated triple 10-bit, 162 MHz video DAC for analog VGA signal output
- » Support up to 1080p, 1920 x 1200 reduced blanking video resolution
- » EDID pass-through from PC source to display
- » Automatic sink detection
- » Low power standby mode operation initiated based on sink detection status
- » Powered from DisplayPort source
- » 3.3V IO, 1.2V Core
- » Low power operation – Active 400mW, standby mode 15mW

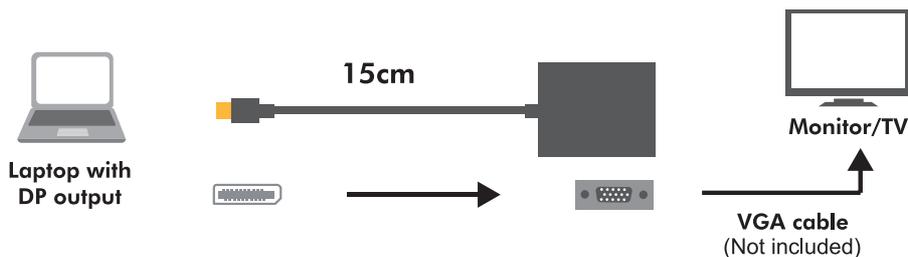

Specification:

Input Connector	DisplayPort Male 20pin
Output Connector	HDB15 pin female
Vertical Frequency Range	50/60Hz
Video Amplifier Bandwidth	180MHz
Resolution	1920x1200, 1920x1080, 1600x1200, 1600x960, 1360x1024, 1360x768, 1280x1024, 1280x720



RoHS
compliant



* The specifications and pictures are subject to change without notice.
* All trade names referenced are the registered namework of their respective owners.

Made in China

LogiLink®



DisplayPort 1.2 to VGA Adapter, Active

Art. No.: CV0059B

Operating Temperature	0°C - 70°C
Operating Humidity	10% to 85 % RH (no condensation)
Storage Temperature	-10 °C - 80 °C
Storage Humidity	5% to 90 % RH (no condensation)
Power Consumption (Max)	485mW
Dimension	246 x 45 x 15mm
Weight	35g
Cable Length	15cm



Package Contents:

- » 1 x DisplayPort to VGA Adapter
- » 1 x User Manual

Package Informations:

- » Packing Dimension: 235 x 75 x 25mm
- » Packing Weight: kg
- » Carton Dimension: 520 x 320 x 285mm
- » Carton Q'ty: 80pcs
- » Carton Weight: kg



Made in China



RoHS
compliant



* The specifications and pictures are subject to change without notice.
*All trade names referenced are the registered namework of their respective owners.