

LogiLink®

Wireless Pan-Tilt IP Camera

Art. No.: WC0030W



The LogiLink WC0030W is an integrated wireless IP Camera solution. It combines a high quality digital Video Camera with network connectivity and a powerful web server to bring clear to your Desktop from anywhere on your local network or over the Internet.

The basic function of it is transmitting remote video on IP network. The high quality video image can be transmitted with 30fps speed on the LAN/WAN by using MJPEG hardware compression technology.

It is based on TCP/IP standard, build-in WEB server which could support Internet Browser. Therefore the management and maintenance of your device become more simply by using network to achieve the remote configuration, start-up and upgrade firmware.

Features:

- » Powerful high-speed video protocol processor
- » High-sensitivity 1/4" CMOS sensor
- » Picture total 300k pixels
- » Support PT control, Pan 270°, Tilt 120°
- » Optimized MJPEG video compression for transmission
- » Multi-level users' management and passwords definition
- » Support wireless network (Wi-Fi/802.11/b/g/n)
- » Supporting Dynamic IP (DDNS) and UPNP LAN and Internet (ADSL, Cable Modem)
- » Giving alarm in cause of motion detection
- » Support image snapshot
- » Support multiple protocols: HTTP/TCP/IP/UDP/SMTP/DDNS /SNTP/DHCP/FTP
- » Support WEP/WPA/WPA2 encryption
- » Support Smart phone control
- » Support Internet Explorer, Firefox, Safari, Google chrome browser
- » Support Android and iPhone app
- » Support P2P function



Free APP „**P2P IPCamera**“ available to download in both Google Play store and iTunes store.



WC0030W



4 052792 035230

Made in China



RoHS
compliant



* The specifications and pictures are subject to change without notice.
* All trade names referenced are the registered namework of their respective owners.

LogiLink®

Wireless Pan-Tilt IP Camera

Art. No.: WC0030W

Specification:

Image Sensor	1/4" Color CMOS Sensor
Display Resolution	640 x 480 Pixels (300k Pixels)
Lens	f: 3.6mm, F2.0 (3.6mm lens is 90°)
Minimum Illumination	0.5Lux @ F2.0
Image Compression	MJPEG
Image Frame Rate	15fps(VGA), 30fps(QVGA)
Resolution	640 x 480 (VGA) 320 x 240 (QVGA)
Flip Mirror Images	Vertical / Horizontal
Light Frequency	50Hz, 60Hz, Outdoor
Video Parameters	Brightness, Contrast
Audio Talk-Back	Built-in Mic
System Interface	10Base-T/100Base-TX Ethernet Port
Supported Protocol	TCP/IP, DHCP, SMTP, HTTP, DDNS, UPNP, PPPoE, FTP, DNS, UDP
Wireless Standard	IEEE 802.11b/g/n
WEP Encryption	Disable / 64 bit / 128 bit
WPA/WPA2 Encryption	TKIP / AES
Power Supply	AC 5V/2A External Power Adapter
Power Consumption	5W (Max.)
Operate Temperature	0°C ~ 55°C (32°F ~ 131°F)
Operating Humidity	20% ~ 85% non-condensing
Storage Temperature	-10°C ~ 60°C (14°F ~ 140°F)
Storage Humidity	0% ~ 90% non-condensing



Best Connectivity



WC0030W



Made in China



RoHS
compliant



* The specifications and pictures are subject to change without notice.
* All trade names referenced are the registered trademark of their respective owners.

LogiLink®

Wireless Pan-Tilt IP Camera

Art. No.: WC0030W

PC System Requirements:

CPU	2.0GHz or above (suggested 3.0GHz)
Memory Size	256MB or above (suggested 1.0GHz)
Display Card	64M or above
Supported OS	Microsoft Windows 2000/XP/Vista/7/8/10 and Mac OS X
Browser	IE6.0/7.0/8.0/Firefox/Safari/Google Chrome or other standard browsers




Package Contents:

- » 1 x Wireless IP Camera
- » 1 x Power Adapter
- » 1 x Network Cable
- » 1 x Mounting Bracket
- » 1 x CD-ROM (Software & Manual)
- » 1 x Quick Installation Guide

Package Informations:

- » Packing Dimension: 190 x 175 x 120mm
- » Packing Weight: 0.8kg
- » Carton Dimension: 395 x 255 x 190mm
- » Carton Q'ty: 4pcs
- » Carton Weight: 3.2kg

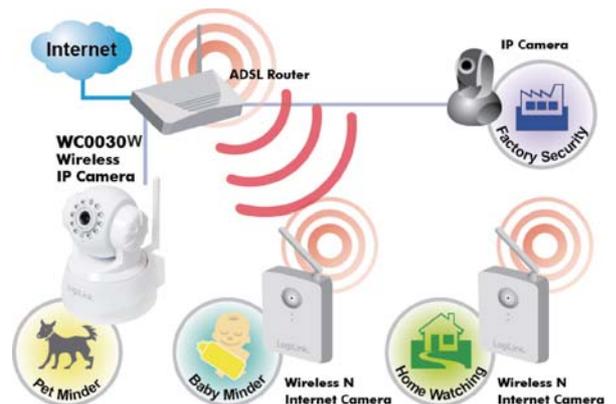

WC0030W



4 052792 035230

Made in China



RoHS
compliant



* The specifications and pictures are subject to change without notice.

*All trade names referenced are the registered namework of their respective owners.

Best Connectivity